


Specifications

A-2200

Rev. 0

Wear Back Elbow (MK 4)

04 / 03

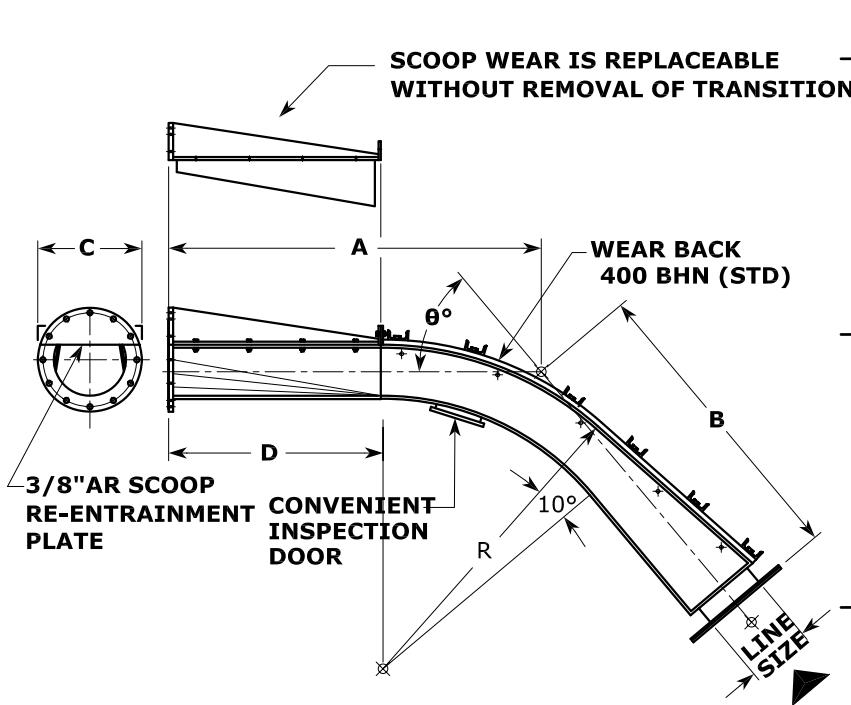

NOTE: DIMENSIONS IN INCHES, WEIGHT IN LBS, VARYING SLIGHTLY WITH PRODUCTION MODELS. REQUEST CERTIFIED DRAWINGS OF PARTICULAR MODELS OR APPLICATIONS FOR EXACT DIMENSIONS.

LINE SIZE	ANGLE	A	B	C	D	R	WT.
10³/₄	10°	46 ⁹ / ₁₆	16 ¹ / ₄	16 ³ / ₈	26	43	380
	15°	42 ¹¹ / ₁₆	23 ⁵ / ₈	16 ³ / ₈	26	43	390
	30°	42 ¹ / ₂	35	16 ³ / ₈	26	43	420
	45°	46 ¹ / ₂	42 ¹⁵ / ₁₆	16 ³ / ₈	26	43	480
	60°	52 ³ / ₁₆	50 ⁵ / ₈	16 ³ / ₈	26	43	480
	90°	68 ³ / ₈	69	16 ³ / ₈	26	43	560
12³/₄	10°	56 ¹³ / ₁₆	18 ¹ / ₁₆	18 ³ / ₈	32	51	590
	15°	52 ¹ / ₁₆	27 ¹ / ₁₆	18 ³ / ₈	32	51	600
	30°	51 ¹¹ / ₁₆	40 ⁵ / ₈	18 ³ / ₈	32	51	640
	45°	56 ³ / ₈	50 ¹ / ₁₆	18 ³ / ₈	32	51	670
	60°	63 ¹ / ₁₆	59 ¹ / ₄	18 ³ / ₈	32	51	710
	90°	82 ¹ / ₄	81	18 ³ / ₈	32	51	780
14	10°	61 ¹⁵ / ₁₆	20 ¹ / ₈	20	35	56	750
	15°	56 ¹³ / ₁₆	29 ¹⁵ / ₁₆	20	35	56	760
	30°	56 ¹ / ₂	44 ³ / ₄	20	35	56	790
	45°	61 ¹¹ / ₁₆	55 ¹ / ₁₆	20	35	56	860
	60°	68 ¹ / ₂	65 ¹ / ₁₆	20	35	56	890
	90°	90 ¹ / ₈	89	20	35	56	950
16	10°	71 ⁷ / ₈	21 ⁵ / ₁₆	22 ¹ / ₈	40	64	960
	15°	65 ¹¹ / ₁₆	32 ¹⁵ / ₁₆	22 ¹ / ₈	40	64	980
	30°	64 ¹⁵ / ₁₆	50 ³ / ₁₆	22 ¹ / ₈	40	64	1000
	45°	70 ³ / ₄	82 ¹ / ₈	22 ¹ / ₈	40	64	1050
	60°	79 ¹ / ₁₆	73 ⁵ / ₈	22 ¹ / ₈	40	64	1120
	90°	103	101	22 ¹ / ₈	40	64	1260
18	10°	79 ³ / ₄	25 ³ / ₈	23 ³ / ₄	45	72	800
	15°	73 ¹ / ₈	38	23 ³ / ₄	45	72	1240
	30°	72 ³ / ₄	57 ¹ / ₁₆	23 ³ / ₄	45	72	1300
	45°	79 ³ / ₈	70 ³ / ₈	23 ³ / ₄	45	72	1370
	60°	88 ¹³ / ₁₆	83 ¹ / ₄	23 ³ / ₄	45	72	1400
	90°	115 ⁷ / ₈	114	23 ³ / ₄	45	72	1510
20	10°	88 ⁹ / ₁₆	28 ³ / ₈	26 ³ / ₈	51	80	1450
	15°	81 ⁹ / ₁₆	42 ¹ / ₈	26 ³ / ₈	51	80	1480
	30°	81 ¹ / ₂	62 ¹⁵ / ₁₆	26 ³ / ₈	51	80	1550
	45°	77 ⁵ / ₈	89 ¹ / ₁₆	26 ³ / ₈	51	80	1620
	60°	91 ⁷ / ₈	99 ⁵ / ₈	26 ³ / ₈	51	80	1650
	90°	126	129 ¹³ / ₁₆	26 ³ / ₈	51	80	1820
4¹/₂	10°	24	4 ¹ / ₂	9 ¹ / ₈	11	18	100
	15°	20 ¹⁵ / ₁₆	9 ¹ / ₈	9 ¹ / ₈	11	18	110
	30°	19 ⁵ / ₈	15 ¹ / ₄	9 ¹ / ₈	11	18	125
	45°	20 ¹ / ₂	19	9 ¹ / ₈	11	18	135
	60°	22 ¹ / ₂	22 ⁷ / ₁₆	9 ¹ / ₈	11	18	145
	90°	17 ³ / ₄	30 ¹ / ₄	9 ¹ / ₈	11	18	160
6⁵/₈	10°	32 ⁹ / ₁₆	5 ¹ / ₂	11 ¹ / ₄	16	26 ¹ / ₂	135
	15°	30 ³ / ₁₆	12 ¹ / ₈	11 ¹ / ₄	16	26 ¹ / ₂	150
	30°	28	21	11 ¹ / ₄	16	26 ¹ / ₂	165
	45°	29 ¹¹ / ₁₆	26 ¹ / ₂	11 ¹ / ₄	16	26 ¹ / ₂	175
	60°	31 ¹³ / ₁₆	31 ¹ / ₂	11 ¹ / ₄	16	26 ¹ / ₂	165
	90°	42 ¹ / ₈	43	11 ¹ / ₄	16	26 ¹ / ₂	200
8⁵/₈	10°	40 ⁷ / ₈	9 ³ / ₁₆	13 ¹ / ₄	21	34 ¹ / ₂	260
	15°	36 ¹¹ / ₁₆	21 ⁷ / ₈	13 ¹ / ₄	21	34 ¹ / ₂	280
	30°	35 ⁵ / ₁₆	27 ¹ / ₈	13 ¹ / ₄	21	34 ¹ / ₂	300
	45°	38 ¹ / ₁₆	33 ⁷ / ₈	13 ¹ / ₄	21	34 ¹ / ₂	320
	60°	42 ³ / ₈	40 ³ / ₁₆	13 ¹ / ₄	21	34 ¹ / ₂	332
	90°	55	55	13 ¹ / ₄	21	34 ¹ / ₂	375