

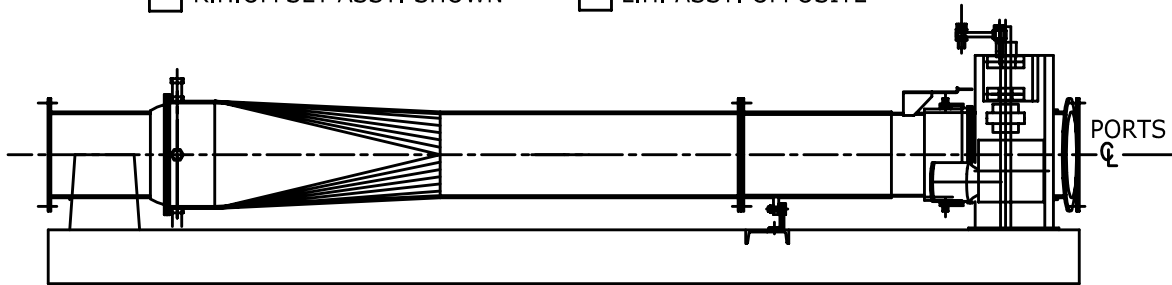


R.H.OFFSET ASSY. SHOWN L.H. ASSY. OPPOSITE

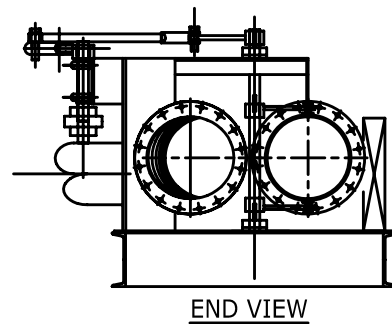

-SEE NOTES
NOS. 7 & 8

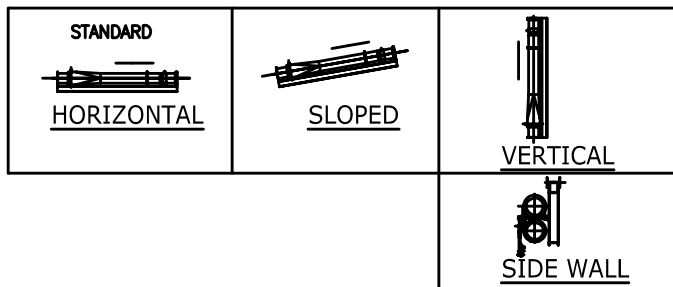

NOTES:

- 1- VALVES ARE TO BE MOUNTED ON RIGID STEEL STRUCTURE OR CONCRETE FOUNDATION, SHIMMED OR GROUTED TO PREVENT RACKING OR DISTORTION.
- 2- IF VALVE IS ELEVATED, CUSTOMER SHOULD PROVIDE WALKWAYS ON BOTH SIDES FOR MAINTENANCE.
- 3- TO COMPENSATE FOR POSSIBLE UNEVEN WEAR ON TRANSITION, THE PIVOT SECTION IS DESIGNED TO ROTATE 360° IN 90° INCREMENTS.
- 4- A NOMINAL AMOUNT OF ADJUSTMENT IS PROVIDED BY MEANS OF THE PIVOT BOLTS AND SPACERS UNDER THE CAMROL TRACK .
- 5- A TOTAL OF (2) LIMIT SWITCHES ARE REQ'D. PER VALVE ASSY.