


TYPICAL ATTENUATION CURVE

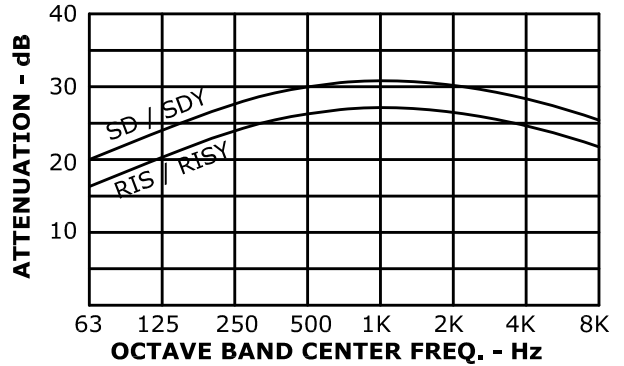

RIS/SD

Series

RISY /SDY

Series (Low Side Connection)

NOTE: Dimensions in inches, weight in lbs, varying slightly with production models. Request certified drawings of particular models or applications for exact dimensions.

P (SIZE)	D	L	N	H	K	Y		WT.
						RISY		
					RISY	MIN.	MAX.	
2 1/2	8	33	3	27	9	FIXED AT 7		25
3	8	39	3	33	10	FIXED AT 7		30
3 1/2	10	39 1/2	3	33 1/2	11	FIXED AT 8		40
4	10	45	3	39	12 1/2	7 1/2	16 1/2	50
5	12	57 1/2	3	51 1/2	15 1/2	9	23	80
6	14	64	3	58	17	9	25 1/2	110
8	18	72	3 1/2	65	21 1/2	12	30 1/2	190
10	22	85	3 1/2	78	25 1/2	13 1/2	37	380
12	26	98	3 1/2	91	29 1/2	15	44	550
14	30	111	3 1/2	104	30	16 1/2	50	800
16	36	113	3 1/2	106	35 1/2	18 1/2	51	1050
18	42	126	3 1/2	119	41	20 1/2	58 1/2	1350
20	42	140	4 1/2	131	47	22	63 1/2	1500
22	48	153	4 1/2	144	46 1/2	23 1/2	69 1/2	2100
24	54	167	4 1/2	158	54	25 1/2	75	2700
26	54	179	4 1/2	170	55 1/2	25 1/2	87	3050
28	60	193	4 1/2	184	61	29 1/2	91	3850
30	66	206	4 1/2	197	66 1/2	30 1/2	98	5150